


STORAGE BUILDINGS

STATES: AR, OK, MO, NE, IL, IN, IA, KS

NON CERTIFIED



Vertical Roof

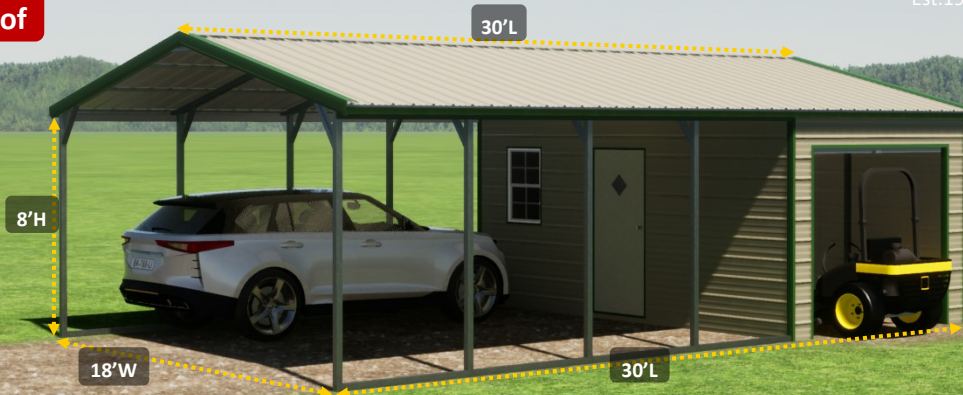

Regular Style



Boxed Eave Style



WXL REGULAR STYLE					BOXED EAVE STYLE					VERTICAL ROOF STYLE				
12x31X8	18x31X8	20x31X8	22x31X8	24x31X8	12x31X8	18x31X8	20x31X8	22x31X8	24x31X8	12x30X8	18x30X8	20x30X8	22x30X8	24x30X8
\$5,117	\$5,365	\$6,055	\$6,800	\$7,132	\$5,393	\$5,779	\$6,331	\$6,938	\$7,546	\$5,938	\$6,313	\$6,851	\$7,442	\$8,034
12x36X8	18x36X8	20x36X8	22x36X8	24x36X8	12x36X8	18x36X8	20x36X8	22x36X8	24x36X8	12x35X8	18x35X8	20x35X8	22x35X8	24x35X8
\$5,435	\$5,683	\$6,511	\$7,118	\$7,726	\$5,573	\$6,097	\$6,787	\$7,394	\$8,140	\$6,246	\$6,757	\$7,429	\$8,021	\$8,747
12x41X8	18x41X8	20x41X8	22x41X8	24x41X8	12x41X8	18x41X8	20x41X8	22x41X8	24x41X8	12x40X8	18x40X8	20x40X8	22x40X8	24x40X8
\$5,911	\$6,160	\$7,126	\$8,057	\$8,340	\$6,049	\$6,442	\$7,402	\$8,009	\$8,795	\$6,845	\$7,228	\$8,161	\$8,753	\$9,520
REFLECTIVE INSULATION ADD ON ROOF ONLY: Add 2' to width and multiply by length. EX. 12' wide x 31' long (14x31= 434 sf x rate = \$ 846.30)										R Value 14.7 \$1.95 SF 95% Reflectivity Helps reduce building condensation				

Standard Features Include:

14 Gauge frame, 8ft Std legs, 29 Gauge roofing, maximum rafter/ column spacing 5' on center or less for 12'-24'w buildings, and 4' on center or less for buildings 26'-30'w. Braces on all center rafters and on top corner posts, 4 ft welded trusses on 22'-24' wide carports. 1-8wx7h door on the side, 1-36"x80" walk door on end, 1-24"x36" window on end.

- Free Installation On Your Level Lot
- Engineer Plans Available Call 877-494-2997
- Note: Frame Lengths Are 20',25',30' Etc. Vertical Roofs Have No Overhang Front Or Back.
- Financing Available / Rent To Own Available
- Rebar Anchors Included /Concrete Anchors Included



2021 V 3.19.21

***30 Day Workmanship warranty** on all Buildings, effective day of Installation.
***20 Year limited warranty** on 12 Gauge framing materials assuming regular care and maintenance given to building.

We strongly recommend you to purchase vertical roofs on buildings 31ft or longer to prevent leaks.




CUSTOMER MUST SUPPLY
LULL LIFT FOR INSTALLATION ON
BUILDINGS TALLER THAN 13FT LEGS.

"ALL PRICES SUBJECT TO CHANGE WITHOUT NOTICE"

©2021 Copyright All Rights Reserved Tri State Carports, Inc



WXL REGULAR STYLE			BOXED EAVE STYLE			VERTICAL ROOF STYLE			12G FRAME UPGRADE	3' BRACE UPGRADE	MOBILE HOME ANCHORS
26x31X8 \$8,887	28x31X8 \$9,211	30x31X8 \$9,674	26x31X8 \$9,233	28x31X8 \$9,557	30x31X8 \$10,019	26x30X8 \$10,082	28x30X8 \$10,398	30x30X8 \$10,849	31' LONG \$510	\$84	\$180
26x36X8 \$9,647	28x36X8 \$9,998	30x36X8 \$10,626	26x36X8 \$10,061	28x36X8 \$10,412	30x36X8 \$11,040	26x35X8 \$11,057	28x35X8 \$11,400	30x35X8 \$12,011	36' LONG \$540	\$96	\$180
26x41X8 \$10,392	28x41X8 \$10,736	30x41X8 \$11,634	26x41X8 \$10,944	28x41X8 \$11,220	30x41X8 \$12,116	26x40X8 \$12,018	28x40X8 \$12,354	30x40X8 \$13,228	41' LONG \$570	\$108	\$240
ROOF REFLECTIVE INSULATION ADD ON: Add 2' to width and multiply by length. EX. 26' wide x 31' long (28x31= 868 sf x rate = \$ 1,693)									3' brace upgrade recommended for buildings 8' and higher. Mobile home anchors if you have high winds in your area.		
R Value 14.7 \$1.95 SF 95% Reflectivity											

12'-24' Wide buildings 10ft Std Storage								CLOSE ONE END								Labor Fees	Build over fee	Cut legs on site			
Over all length of side walls	10Ft std	15ft	20Ft	25Ft	30Ft	35Ft	40Ft	12'W	18' W	20' W	22' W	24' W	26' W	28' W	30'W	20'L	\$150	\$100			
5Ft Increments	included	\$140	\$286	\$421	\$562	\$702	\$842	\$722	\$845	\$969	\$1,092	\$1,216	\$1,495	\$1,658	\$1,820	25'L	\$175	\$125			
Vertical sides add on	\$293	\$390	\$455	\$520	\$553	\$585	\$650	Vertical ends add on (per end)								30'L	\$200	\$150			
26'-30' Wide buildings 12ft or less Std Storage								\$335	\$503	\$558	\$614	\$670	\$725	\$781	\$837	35'L	\$250	\$175			
Over all length of side walls	12Ft std	16ft	20Ft	24Ft	28Ft	32Ft	36Ft	Ends insulation add on (per end)								40'L	\$275	\$200			
4Ft Increments	included	\$166	\$286	\$421	\$562	\$686	\$819	\$258	\$387	\$429	\$472	\$515	\$558	\$601	\$644						
Vertical sides add on	\$293	\$390	\$455	\$520	\$553	\$585	\$650														
Sides Insulation add on	\$375	\$500	\$624	\$749	\$874	\$1,092	\$1,248														
CONCRETE DIMENSIONS																					
In reference to frame size Ex. 12'Wx30'L building frame size. Make pad 12'8"Wx30'8"L. the extra 4" all around make it slope away from the building edge to run off water.																					




Add \$100.00 Trip Fee on any purchase less than \$500.00	Connection fees valid only if you are purchasing 2 buildings at the same time (not on existing buildings)	Connecting end to end. \$100.00 Connecting side to side. \$150.00
--	---	--

EXTRA FRAME BOW	WELDED TRUSSES	EXTRA BRACES	GARAGE DOORS	*GABLE END
12'-20' WIDE \$210 EA. 22'-24' WIDE \$216 EA. 26'-30' WIDE \$240 EA. ADD \$10.00 FOR EACH ADDITIONAL HEIGHT.	4' LONG \$27.00 EA. 5' LONG \$42.00 EA. 8' LONG \$78.00 EA.	2' LONG \$12.00 EA. 3' LONG \$18.00 EA.	6'WX6'H \$420.00 EA. 8'WX7'H \$540.00 EA. 9'WX7'H \$600.00 EA.	12'-20' WIDE \$240 EA. 22'-24' WIDE \$330 EA. 26'-30' WIDE \$360 EA. *CARPORT PEAK ENCLOSED
MOBILE HOME ANCHORS	ASPHALT ANCHORS	WINDOWS white with grids	10'WX8'H \$660.00 EA. 10'WX10'H \$720.00 EA. 12'WX12'H \$1,920.00 EA.	**EXTENDED GABLE
3/4"X30" \$30.00 EA.	3/4"X30" \$30.00 EA.	24"X36" \$180.00 EA.	ADD \$100.00 SIDE DOOR FEE (PER EACH DOOR) <u>BUILDING MUST BE 1' TALLER TO INSTALL DOOR ON SIDE.</u>	12'-20' WIDE \$420 EA. 22'-24' WIDE \$450 EA. 26'-30' WIDE \$660 EA.
WALK IN DOOR left outswing	EXTRA PANELS 36" wide		4 EXTRA SUPPORTS	**GABLE PLUS 3' PANEL
36"X80" \$300.00 EA. ADD \$50.00 SIDE FEE <u>BUILDING MUST BE A MIN OF 7FT TALL TO INSTALL DOOR ON SIDE.</u>	21' LONG \$108.00 EA. 26' LONG \$132.00 EA. 31' LONG \$156.00 EA.	*36' LONG \$180.00 EA. *41' LONG \$216.00 EA. *NOT A CONTINUOUS PANEL.	RECOMMENDED 10-12' TALL ON CONCRETE OR GROUND.	ADD 40% FOR VERTICAL GABLES
EXTRA L TRIM	EXTRA J TRIM	45° TRIM KIT	\$400.00	
\$1.14 (PER FT)	\$1.02 (PER FT)	\$90.00 EA. MUST CLOSE END OR SIDE FIRST.		

FRAME OUTS	WINDOW \$80.00 EACH	DOOR FRAME OUTS	6'W-12'W ON END \$100.00 EACH 13'W-16'W ON END \$300.00 EACH 6'W-12'W ON SIDE \$200.00 EACH 13'W-16'W ON SIDE \$400.00 EACH	16FT WIDE MAX ON END AND SIDE DOOR OPENINGS	ON ENDS: MUST CLOSE FIRST FOR FRAME OUTS, IF NO PANELS WANTED ON END (FRAME END ONLY) <u>DISCOUNT 20% FROM CLOSED END PRICE.</u>
	WALK DOOR \$85.00 EACH				



Double leg system



Reflective Insulation



Walk in door



Roll up door




Window



Extra support
2' Under Ground



45° Trim Kits



Gable end
2021 V 3.19.21